


# L-80S/4

# LH-80S/4



| 50 Hz | Motor 400V               | $P_{2N}$ [kW] | $I_N$ [A]     | $I_{max}$ [A] | [kg] | H [mm] |
|-------|--------------------------|---------------|---------------|---------------|------|--------|
|       | KP-90-2 F29              | 1,1           | 2,44          | 3,8           | 85   | 510    |
|       | KP-90-2 F29              | 1,5           | 3,19          | 3,8           | 85   | 510    |
|       | KP-100-2 F29             | 2,2           | 4,7           | 6,8           | 95   | 535    |
|       | KP-100-2 F29             | 3             | 5,96          | 6,8           | 99   | 535    |
|       | KP-112-2 F29             | 4             | 8,29          | 9,3           | 125  | 500    |
| 60 Hz | Motor 380-400V(460-480V) | $P_{2N}$ [kW] | $I_N$ [A]     | $I_{max}$ [A] | [kg] | H [mm] |
|       | KP-90-2 F29              | 1,5 (1,8)     | 3,29 (3,39)   | 3,8           | 85   | 510    |
|       | KP-100-2 F29             | 2,2 (2,6)     | 4,85 (4,9)    | 6,8           | 95   | 535    |
|       | KP-100-2 F29             | 3 (3,6)       | 6,13 (6,39)   | 6,8           | 99   | 535    |
|       | KP-112-2 F29             | 4 (4,8)       | 8,49 (8,6)    | 9,3           | 125  | 500    |
|       | KP-133 G2 F29            | 5,5 (6,6)     | 10,72 (11,29) | 11,8          | 135  | 565    |

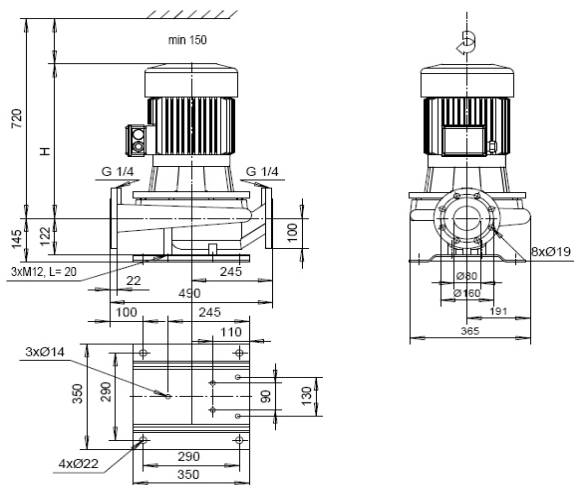