

L-80A/4 VS

LH-80A/4 VS




LS-80A/4 VS

DN80

600 - 1800 r/min

Ø188

3~ 400 V

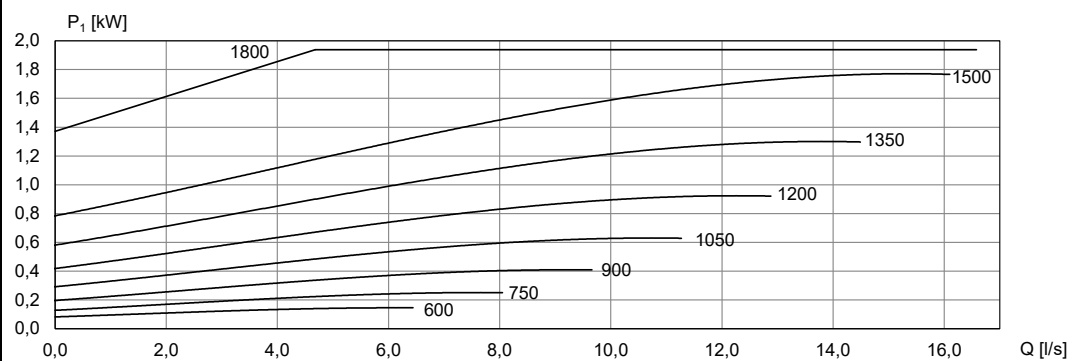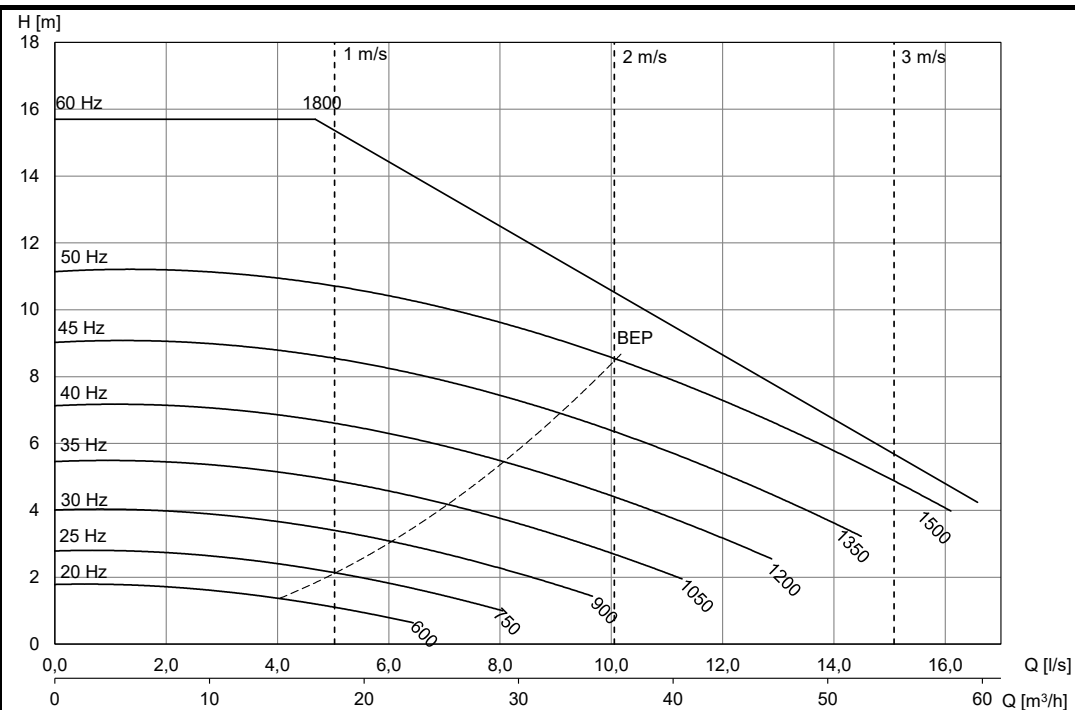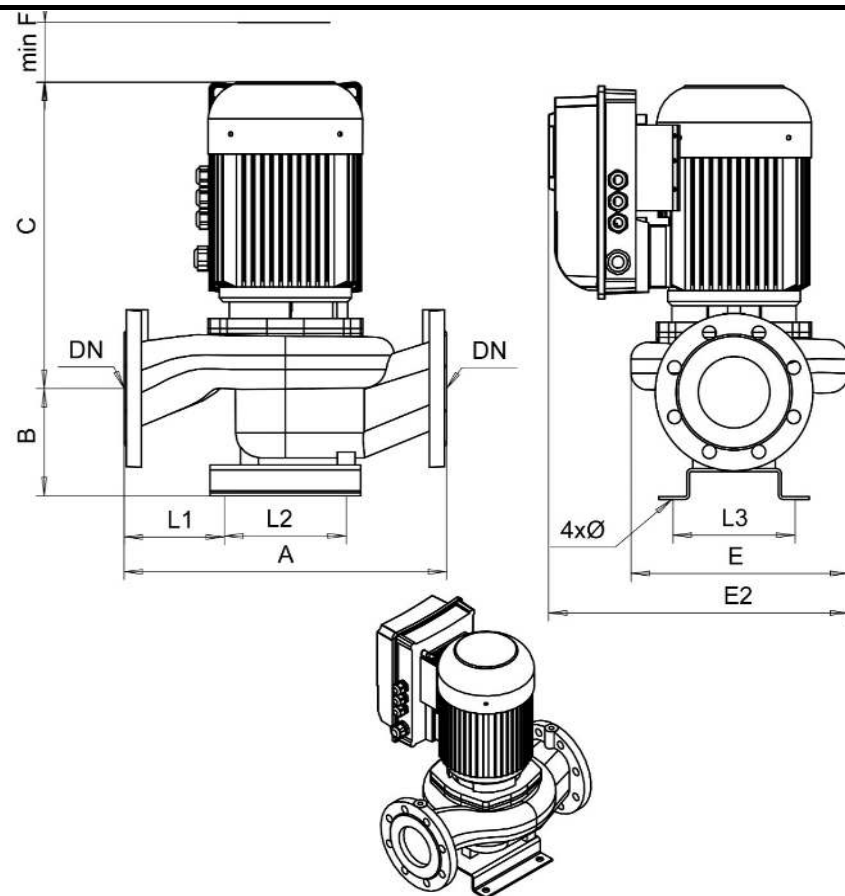

| [mm] |     |     |      |     |     |    |     |     |    |
|------|-----|-----|------|-----|-----|----|-----|-----|----|
| A    | B   | C   | minF | E   | E2  | L1 | L2  | L3  | Ø  |
| 360  | 140 | 460 | 150  | 270 | 420 | 93 | 170 | 170 | 16 |

| Motor         | P <sub>2N</sub> [kW] | I <sub>N</sub> [A] (3x400V) | [kg] |
|---------------|----------------------|-----------------------------|------|
| KPVS-90-2 F19 | 1,5                  | 4,0                         | 57   |