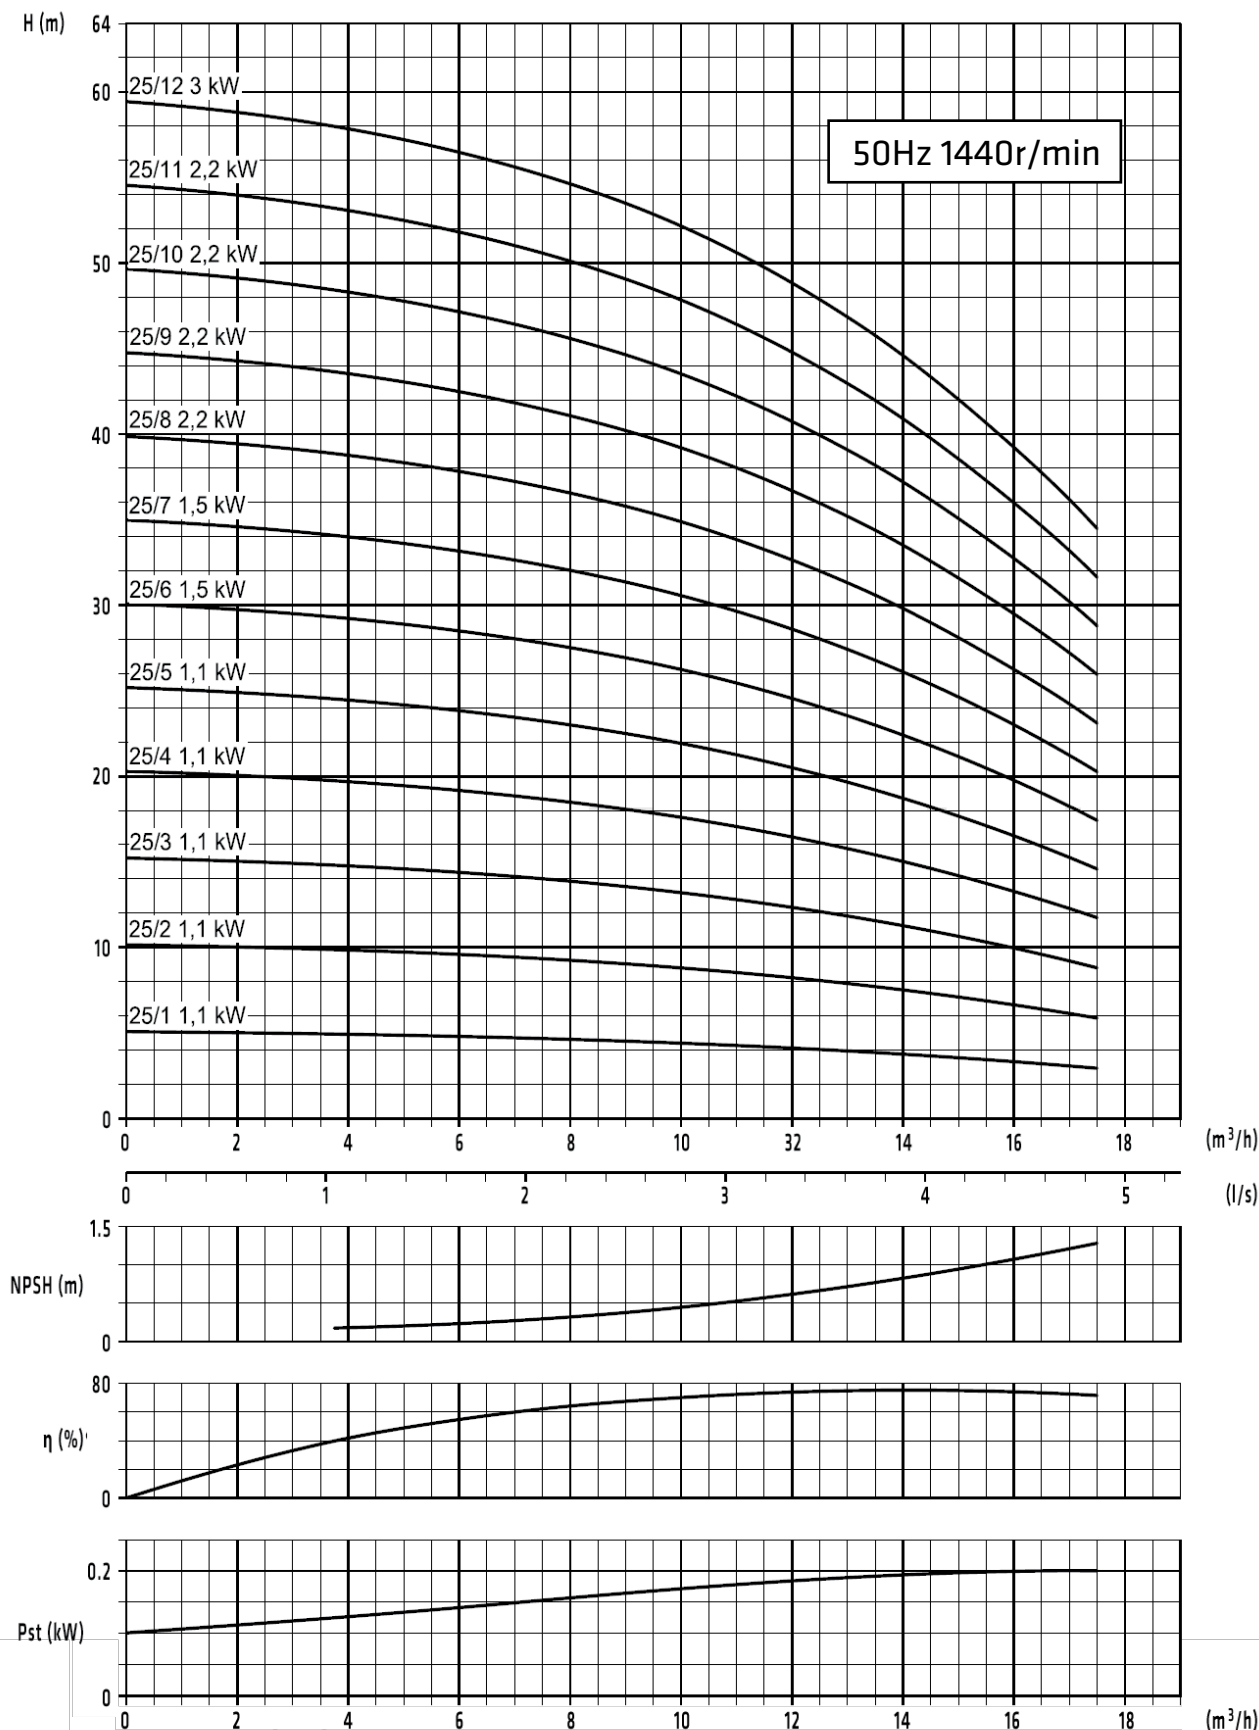


HYDRAULIC PERFORMANCE CURVE

MVVF 25 B
MVVSF 25 B
 DN65

MVVCF 25 B
 DN65

1440r/min



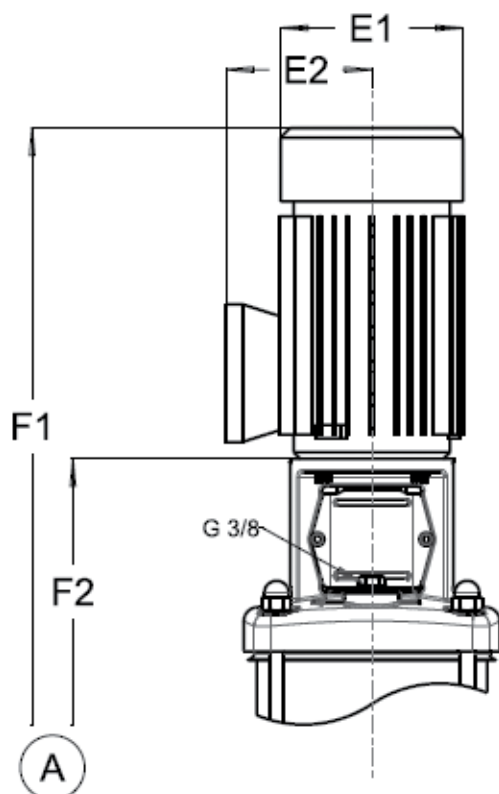
MVVF 25 B
MVVSF 25 B

DN65

MVVCF 25 B

DN65

1440r/min

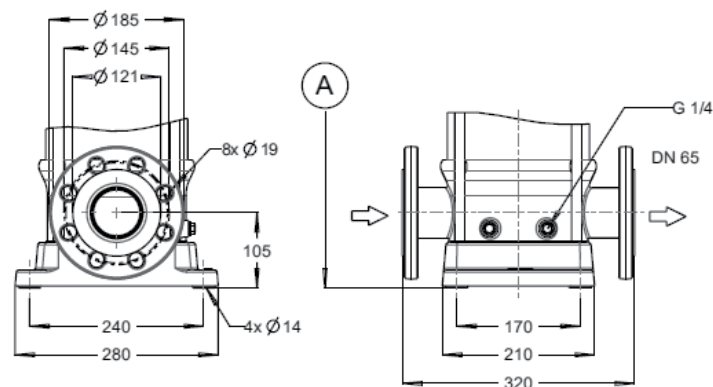

MVVF 25 B, MVVSF 25 B (4 napainen)

Pyöreä laippa

Normi: EN 1092-1/1092-2

Koko: DN65

Pumpun paineluokka: PN40

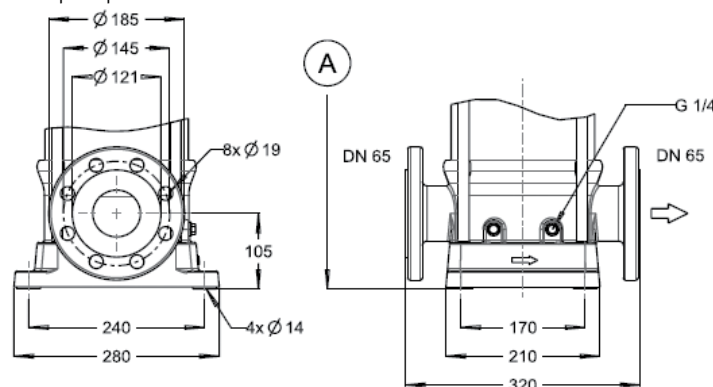

MVVCF 25 B (4 napainen)

Pyöreä laippa

Normi: EN 1092-1/1092-2

Koko: DN65

Pumpun paineluokka: PN40



MVV(C/S)F							
Model	Power (kW)	Current (A), 3 x 400V	E1	E2	F1	F2	Net weight
25/1	1,1	2,6	176	141	678	408	66
25/2	1,1	2,6	176	141	743	473	69
25/3	1,1	2,6	176	141	808	538	71
25/4	1,1	2,6	176	141	873	603	74
25/5	1,1	2,6	176	141	938	668	78
25/6	1,5	3,4	195	145	1018	733	83
25/7	1,5	3,4	195	145	1083	798	85
25/8	2,2	4,5	195	145	1198	868	98
25/9	2,2	4,5	195	145	1263	933	101
25/10	2,2	4,5	195	145	1328	998	103
25/11	2,2	4,5	195	145	1393	1063	107
25/12	3	6,8	195	145	1458	1128	109

Pumppumoottori on korkeahyötysuhteinen IE2 (ent. EFF1) vaatimukset täyttävä IEC-normimoottori (IEC 60034-30/EUP-direktiivi 2005/32/EC)

Subject to change without prior notice.