


HYDRAULIC PERFORMANCE CURVE

MVVF 25 B
MVVSF 25 B
 DN65

MVVCF 25 B
 DN65


3000r/min

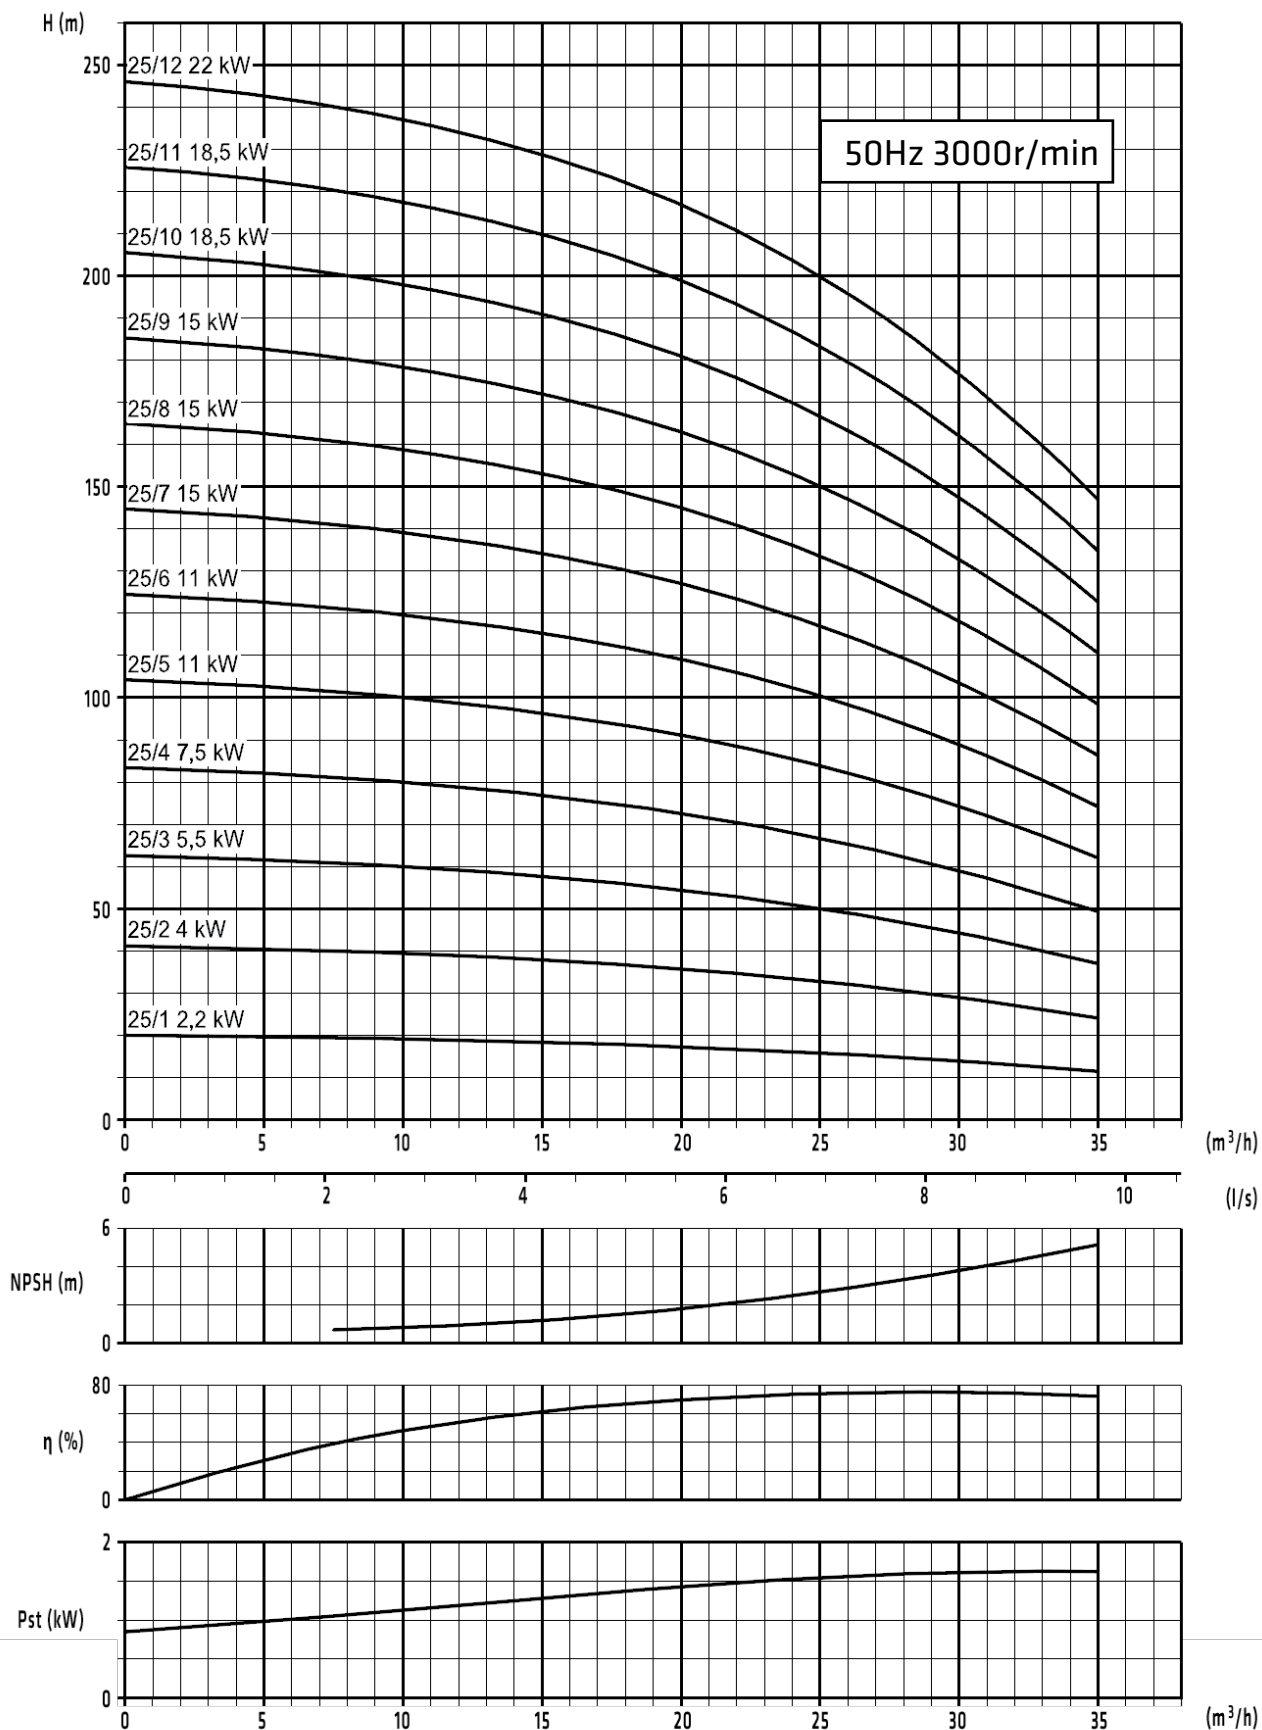

MVVF 25 B

MVVSF 25 B

DN65

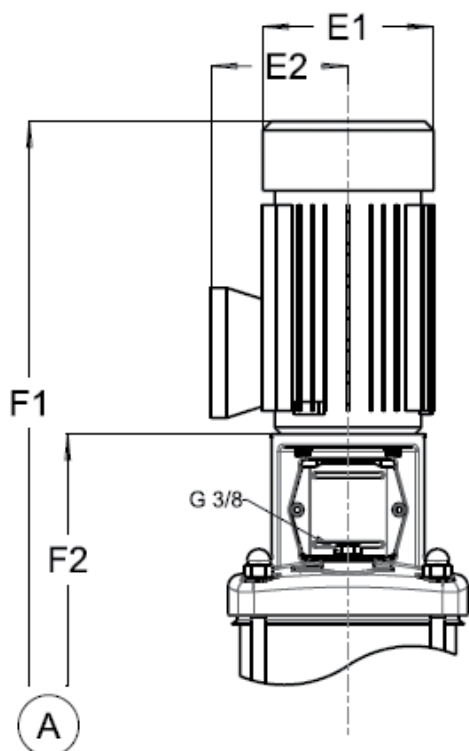


MVVCF 25 B

DN65

3000r/min


MVV 25 B, MVVSF 25 B

Pyöreä laippa
Normi: EN 1092-1/1092-2
Koko: DN65
Pumpun paineluokka: PN40

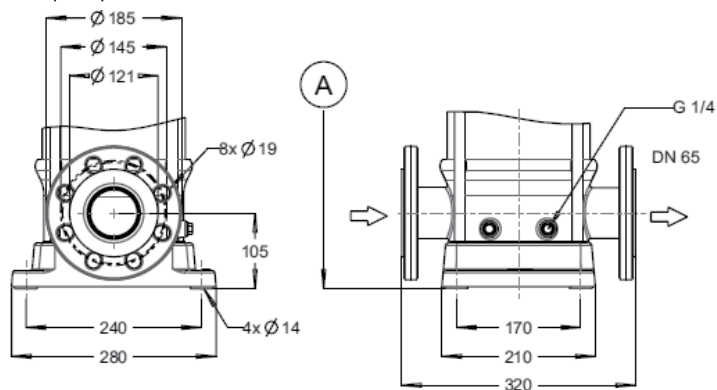

MVVCF 25 B

Pyöreä laippa
Normi: EN 1092-1/1092-2
Koko: DN65
Pumpun paineluokka: PN40

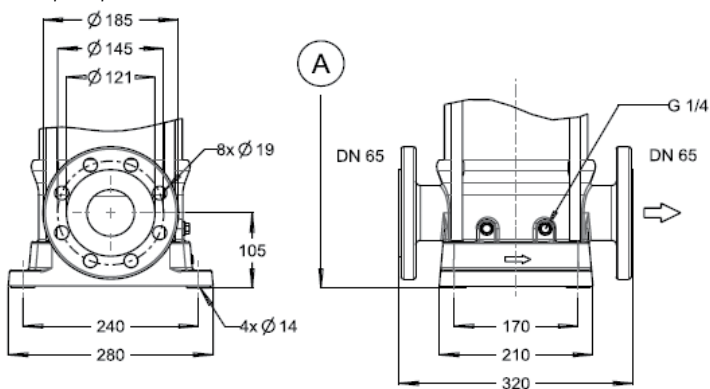

MVV(C/S)F							
Malli	Teho (kW)	Nimellisvirta (A), 3 x 400V	E1	E2	F1	F2	Netto paino
25/1	2,2	4,17	176	141	693	408	66
25/2	4	7,29	223	167	818	478	69
25/3	5,5	10,07	266	178	999	634	71
25/4	7,5	11,11	266	178	1064	699	74
25/5	11	19,74	315	204	1292	794	78
25/6	11	19,74	315	204	1357	859	83
25/7	15	26,35	315	204	1422	924	85
25/8	15	26,35	315	204	1487	989	98
25/9	15	26,35	315	204	1552	1054	101
25/10	18,5	32,1	315	204	1699	1119	103
25/11	18,5	32,1	315	204	1764	1184	107
25/12	22	38,1	350	223	1829	1249	109

Pumppumoottori on korkeahyötysuhteinen IE2 (ent. EFF1) vaatimukset täyttävä IEC-normimoottori (IEC 60034-30/EUP-direktiivi 2005/32/EC)

Subject to change without prior notice.