

HYDRAULIC PERFORMANCE CURVE

MVV 2 B
MVVS 2 B


G 1

MVVF 2 B
MVVSF 2 B

DN25

MVVCf 2 B

DN25

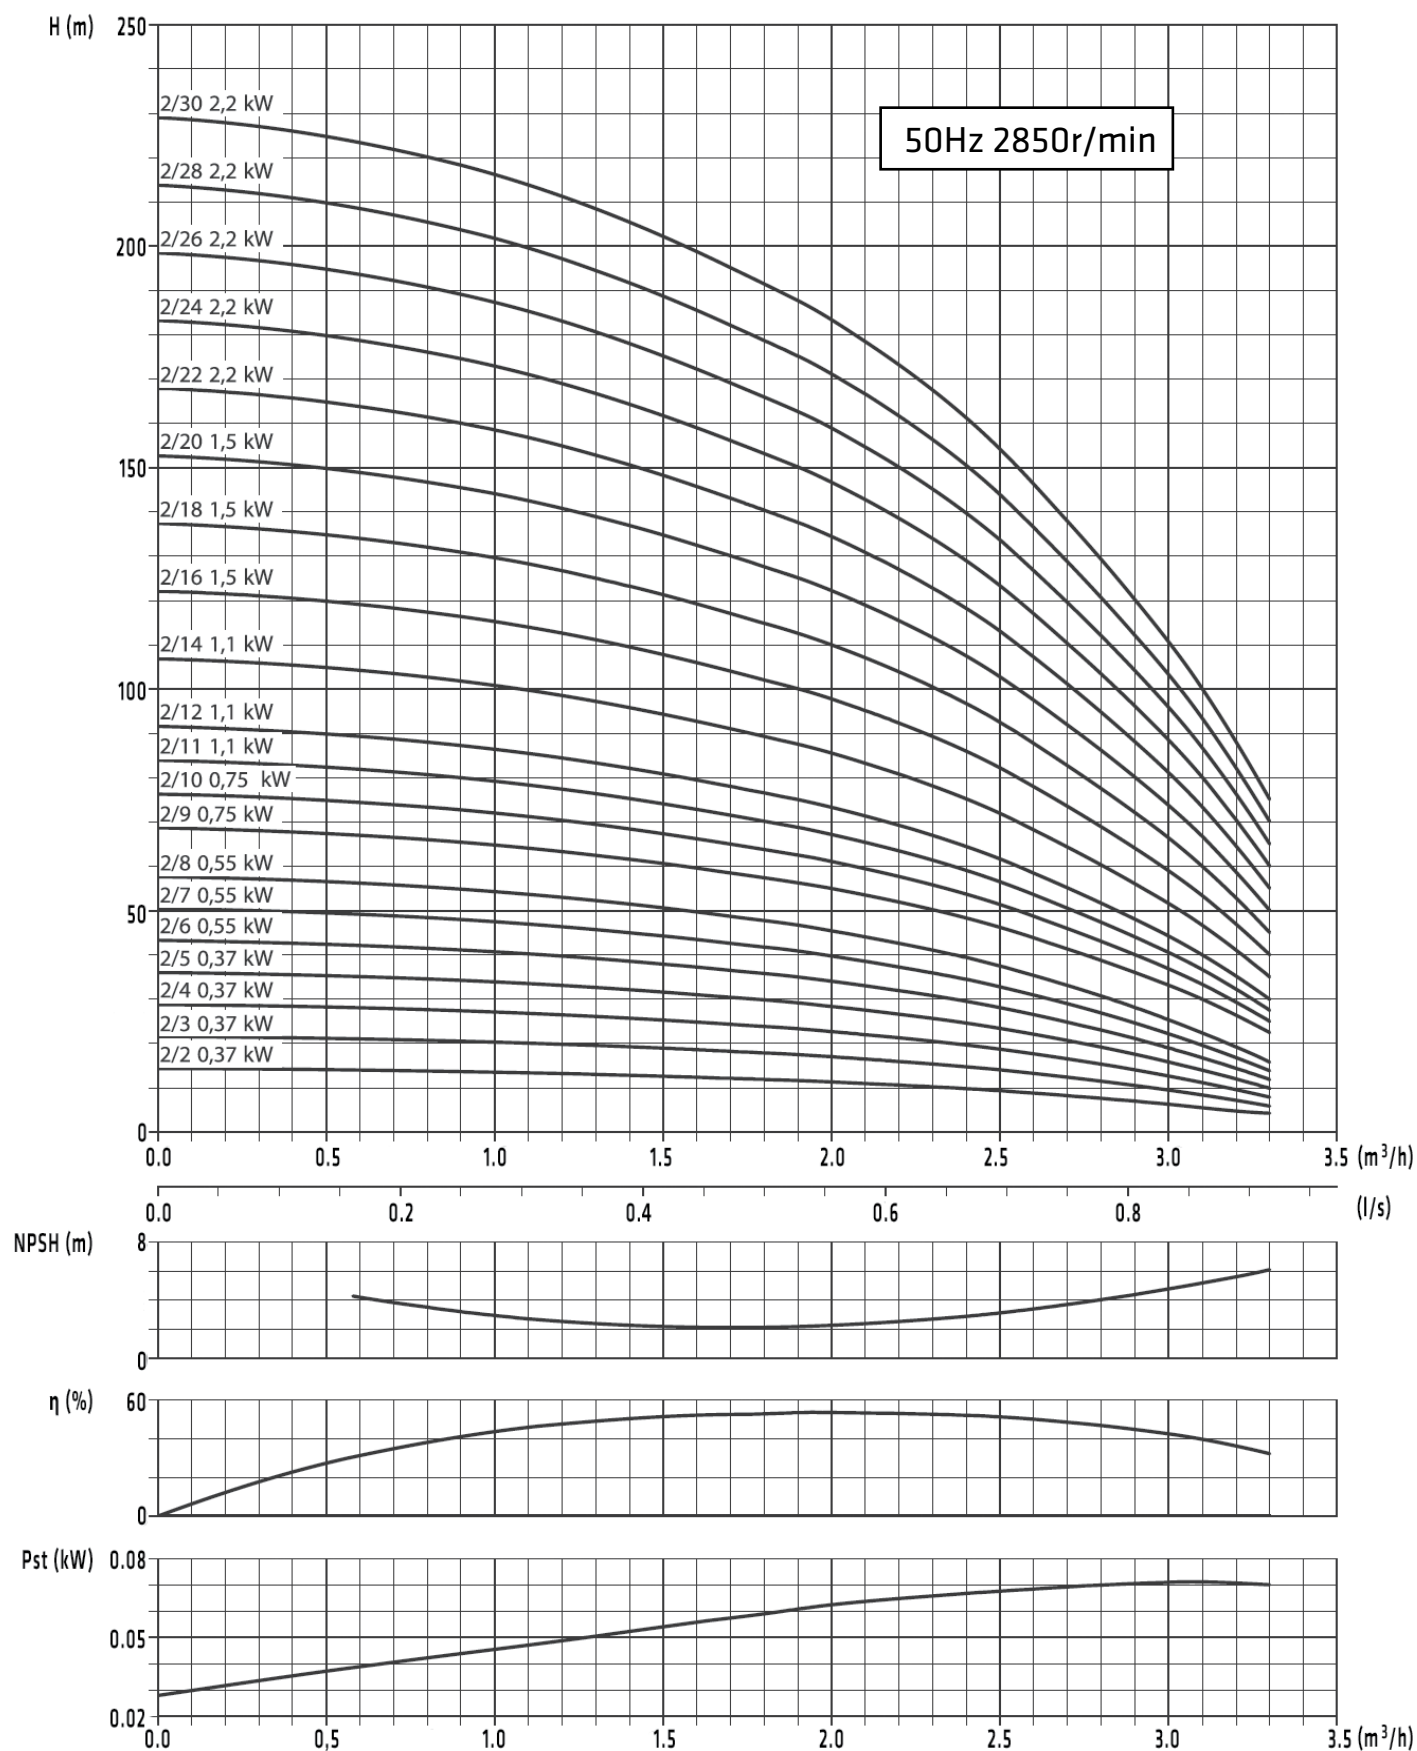

MVV 2 B
MVVS 2 B


G 1

MVVF 2 B
MVVSF 2 B

DN25

MVVCF 2 B

DN25

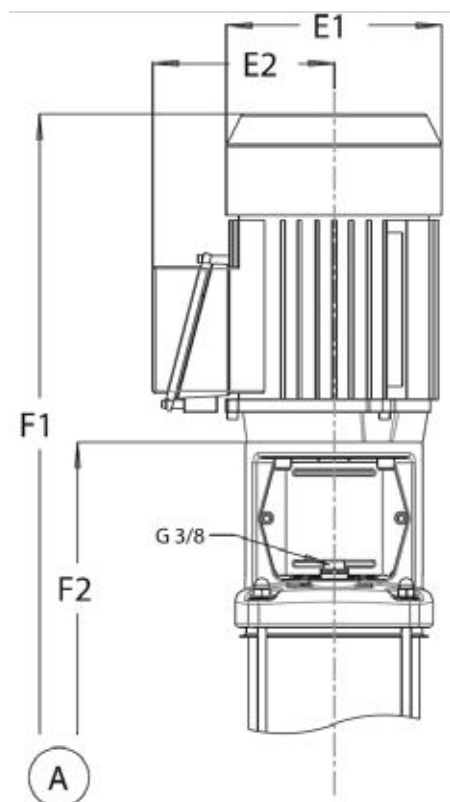**MVV 2 B, MVVS 2 B**

Counter flange with female thread included


MVV: Cataphoric coated cast iron

MVVS: Cast Stainless steel 1.4408

Norm: G EN ISO 228

Size: G 1

Pressure class: PN16

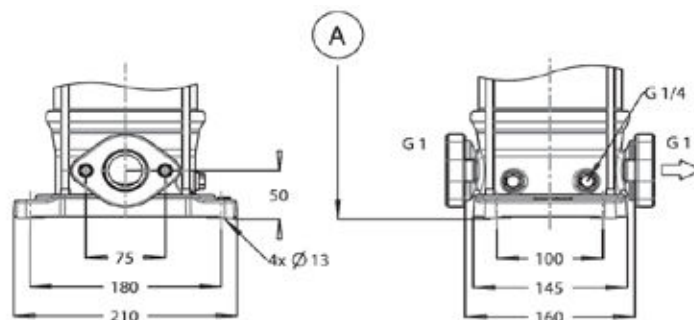
**MVVF 2 B, MVVSF 2 B, MVVCF 2 B**

Cast iron flange

Norm: EN 1092-1/1092-2

Size: DN25

Pressure class: PN25

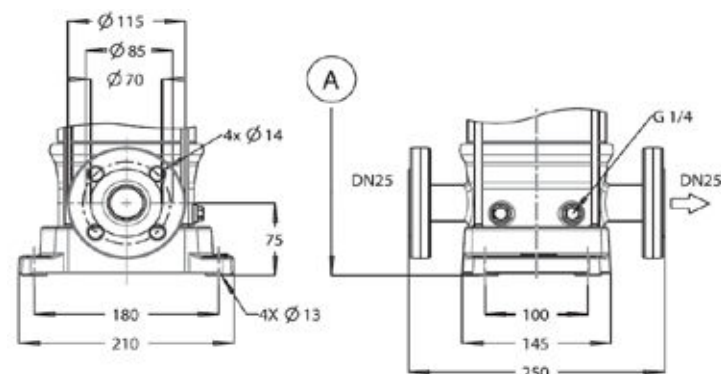

MVV(C/S)F							
Model	Power (kW)	Current (A), 3 x 400V	Net weight	E1	E1	F1	F2
2/2	0,37	0,94	22	138	109	497	284
2/3	0,37	0,94	23	138	109	518	305
2/4	0,37	0,94	23	138	109	540	327
2/5	0,37	0,94	24	138	109	561	348
2/6	0,55	1,33	24	138	109	583	370
2/7	0,55	1,33	25	138	109	604	391
2/8	0,55	1,33	25	138	109	626	423
2/9	0,75	1,72	32	160	150	701	444
2/10	0,75	1,72	32	160	150	723	466
2/11	1,1	2,43	32	160	150	744	487
2/12	1,1	2,43	33	160	150	766	509
2/14	1,1	2,43	34	160	150	809	552
2/16	1,5	2,9	40	185	160	858	605
2/18	1,5	2,9	41	185	160	901	648
2/20	1,5	2,9	42	185	160	944	691
2/22	2,2	4,17	46	185	160	1016	734
2/24	2,2	4,17	46	185	160	1059	777
2/26	2,2	4,17	47	185	160	1102	820
2/28	2,2	4,17	48	185	160	1145	863
2/30	2,2	4,17	64	185	160	1188	906

Pump motor according to high efficiency IE2 (previous EFF1) classified IEC norm motor
 (IEC 60034-30/EUP- directive 2005/32/EC)

Subject to change without prior notice.