


MVVF 40 B
MVVSF 40 B
 DN80

MVVCF 40 B
 DN80

1500r/min

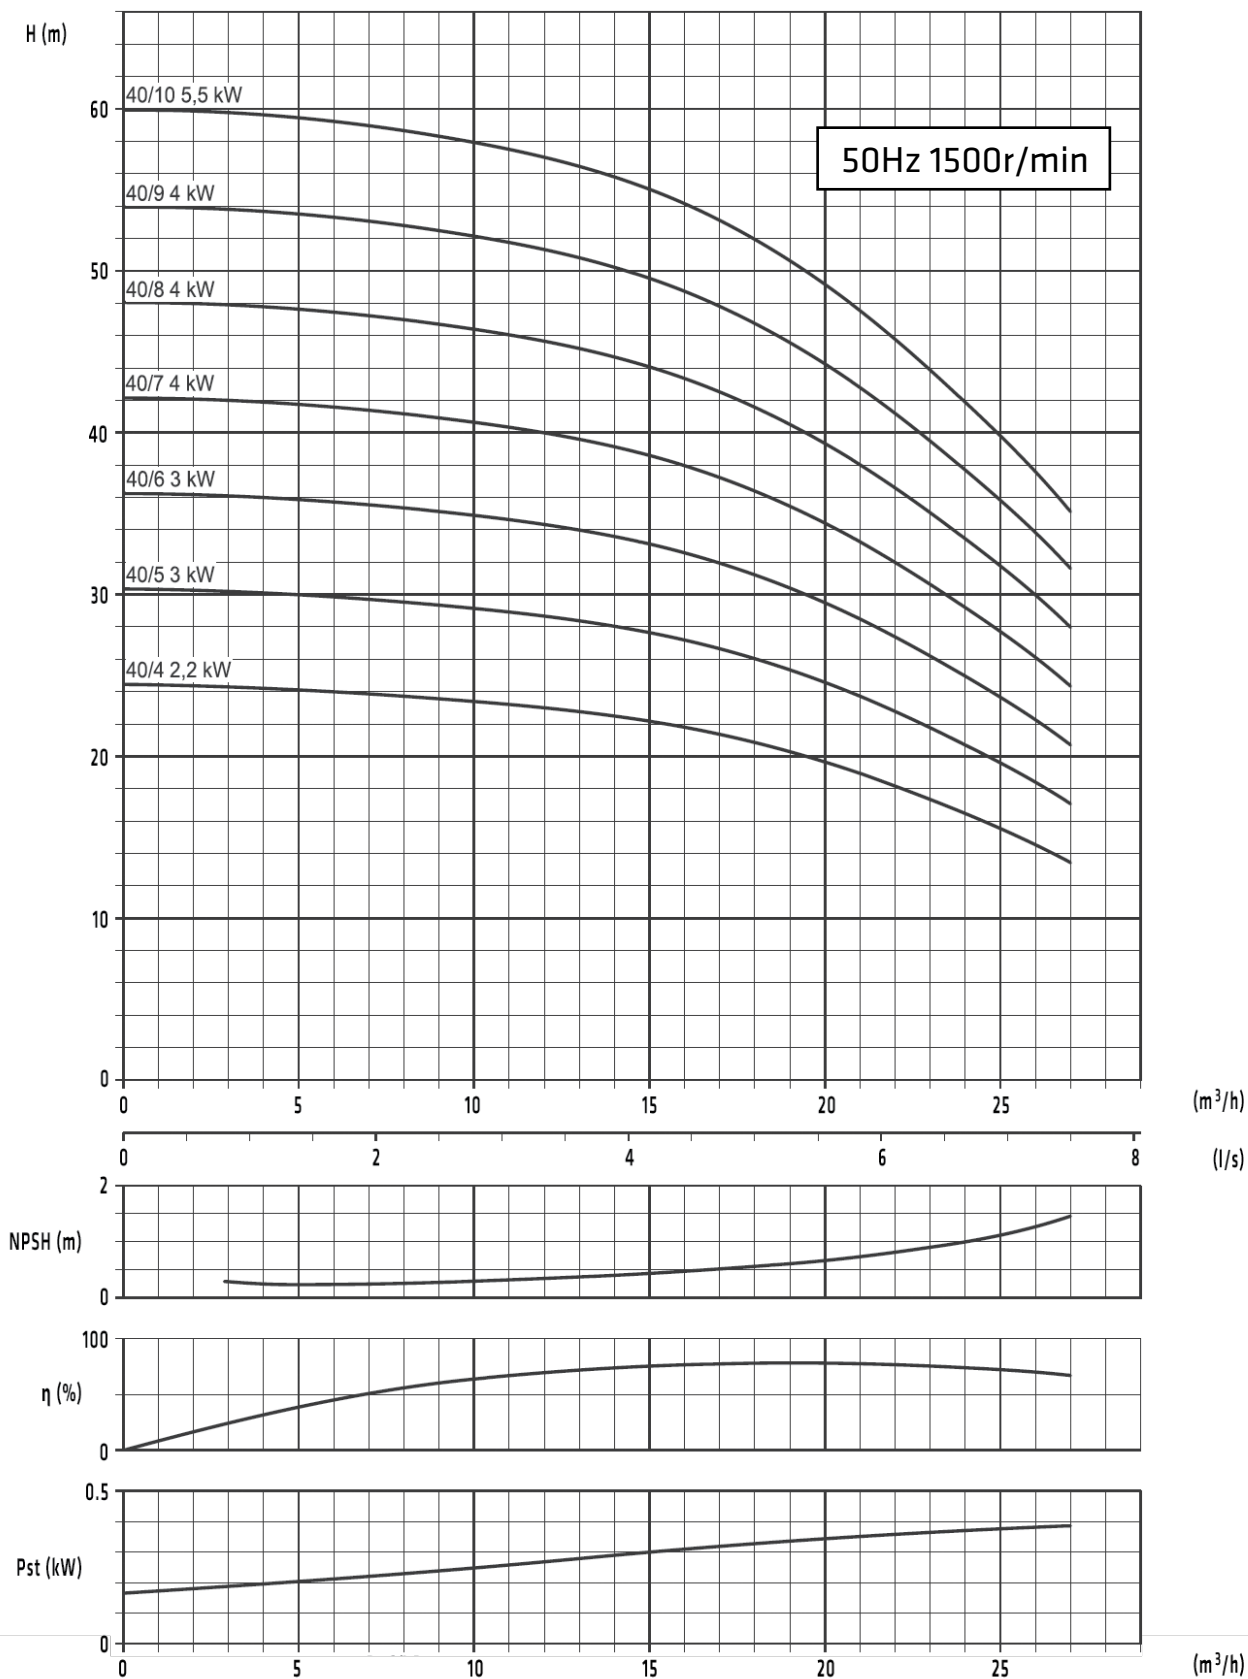

MVVF 40 B

MVVSF 40 B

DN80

MVVCF 40 B




DN80

1500r/min

MVV-sarja



MVVF 40 B, MVVSF 40 B (4 napainen)

Pyöreä laippa
Normi: EN 1092-1/1092-2
Koko: DN80
Pumpun paineluokka: PN16

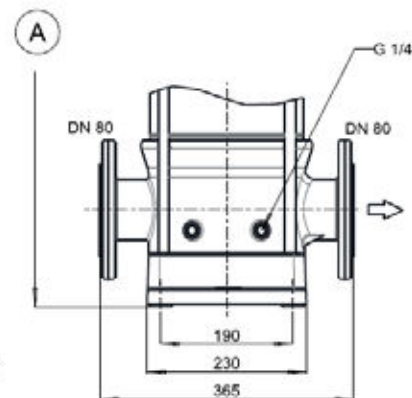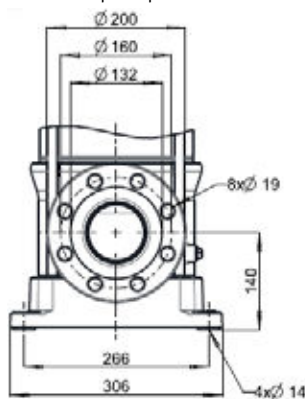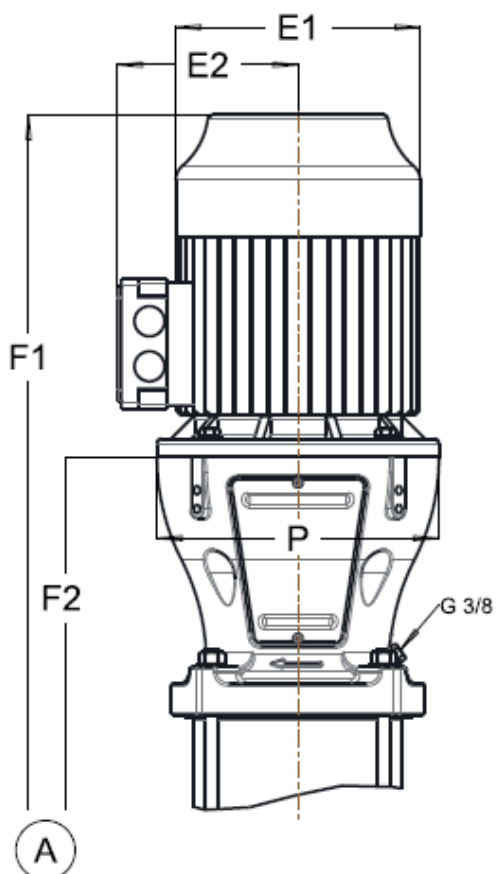

MVVCF 40 B (4 napainen)

Pyöreä laippa
Normi: EN 1092-1/1092-2
Koko: DN80
Pumpun paineluokka: PN16

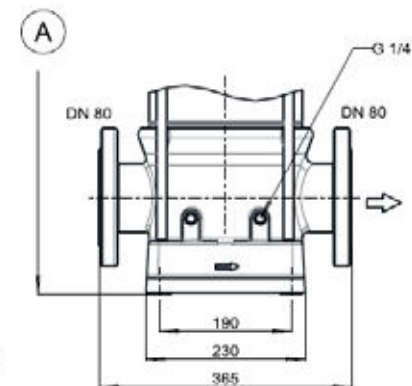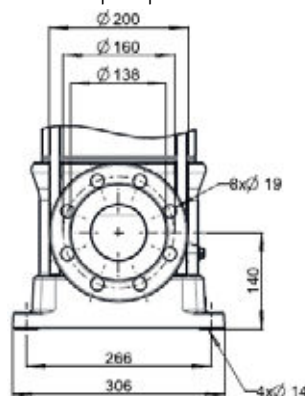

MVV(C/S)F							
Malli	Teho (kW)	Nimellisvirta (A), 3 x 400V	E1	E2	F1	F2	Netto paino
40/4	2,2	4,5	195	145	1051	721	103
40/5	3	6,8	195	145	1129	799	110
40/6	3	6,8	195	145	1207	877	113
40/7	3	6,8	220	167	1306	955	131
40/8	4	8,4	220	167	1384	1033	144
40/9	4	8,4	220	167	1462	1111	158
40/10	5,5	11,3	260	192	1664	1279	197

Pumppumoottori on korkeahyötysuhteinen IE2 (ent. EFF1) vaatimukset täyttävä IEC-normimoottori (IEC 60034-30/EUP-direktiivi 2005/32/EC)

01/2014 Oikeus muutoksiin pidätetään

