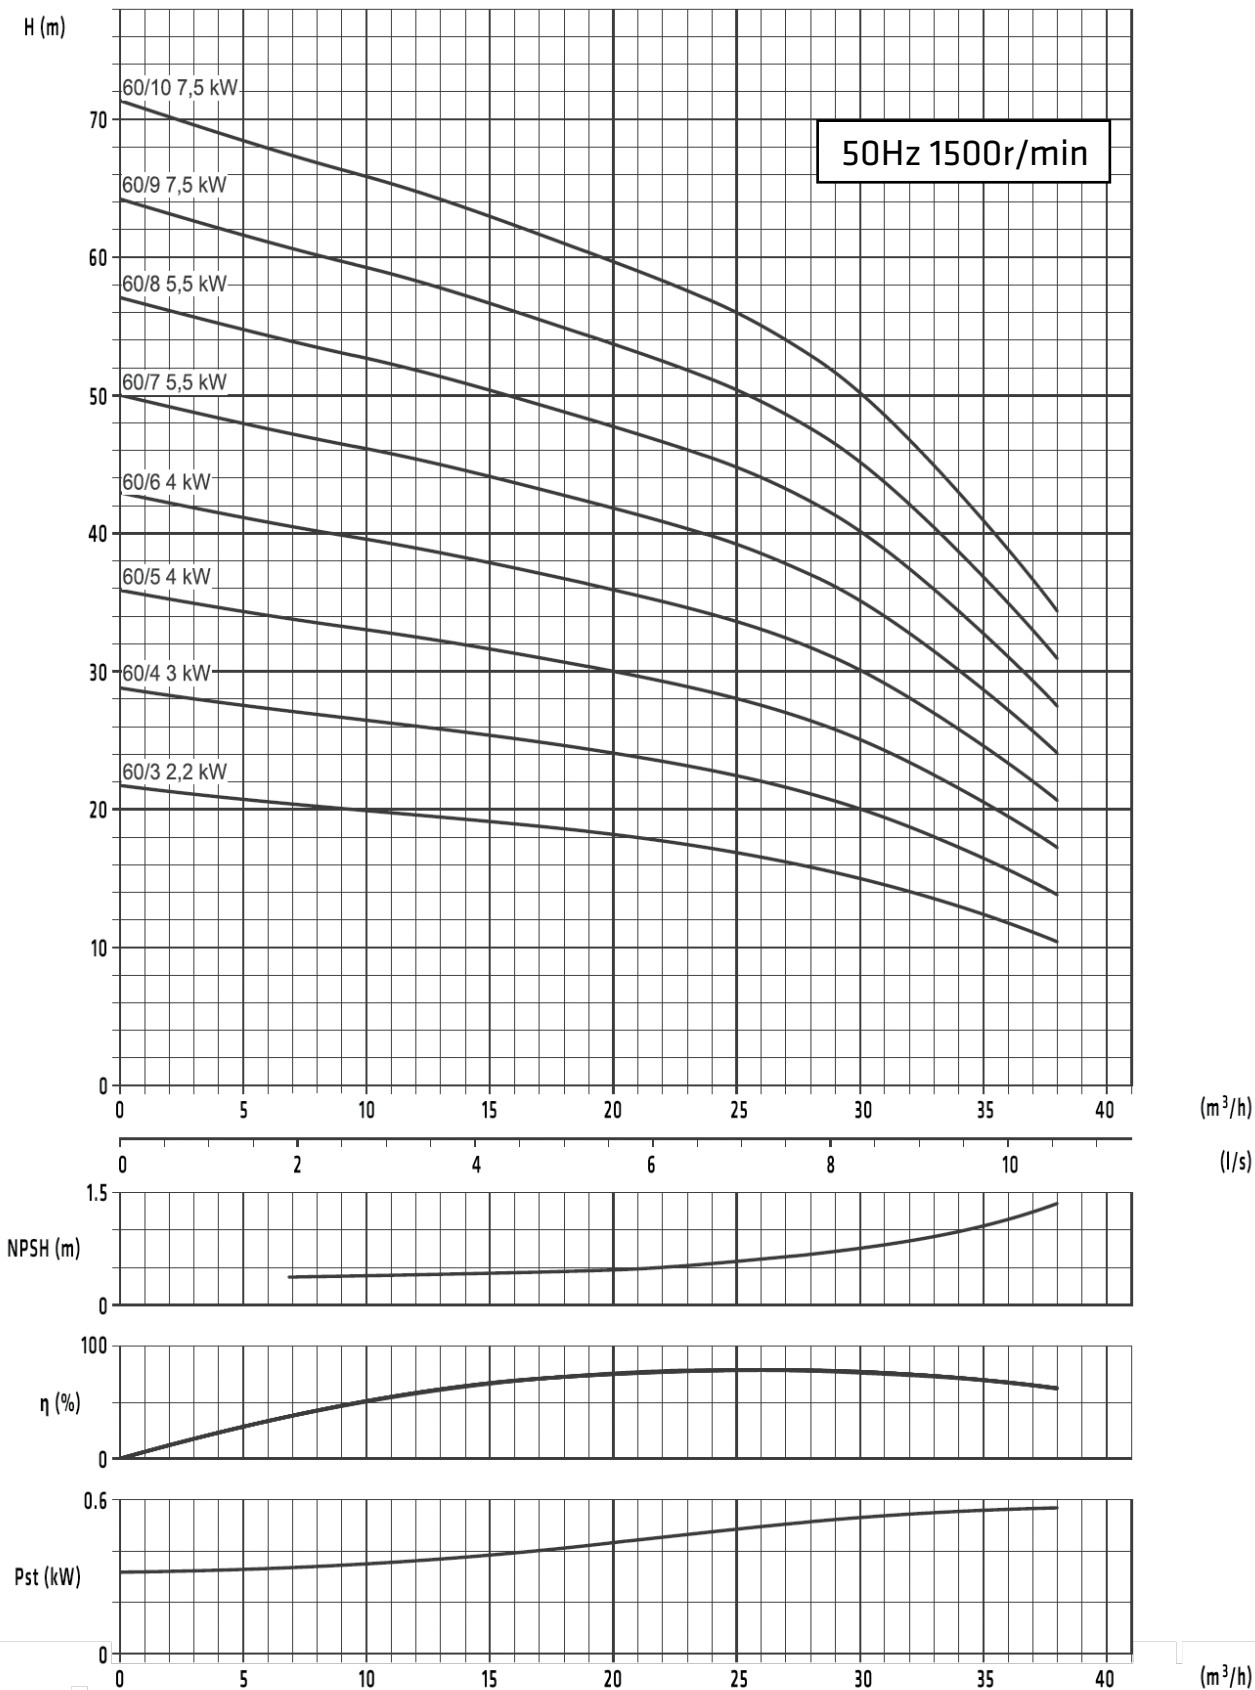


MVVF 60 B
MVVSF 60 B
 DN100

MVVCF 60 B
 DN100

1500r/min


KOLMEKS
www.kolmeks.fi

MVVF 60 B

MVVSF 60 B


DN100

MVVCF 60 B

DN100



1500r/min

MVV-sarja

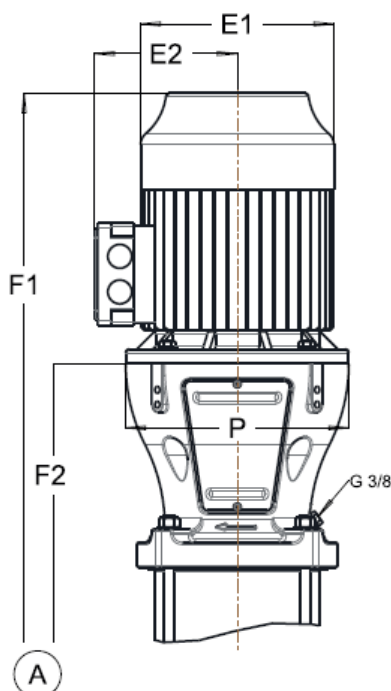



MVVF 60 B, MVVSF 60 B (4 napainen)

Pyöreä laippa
Normi: EN 1092-1/1092-2
Koko: DN100
Pumpun paineluokka: PN16

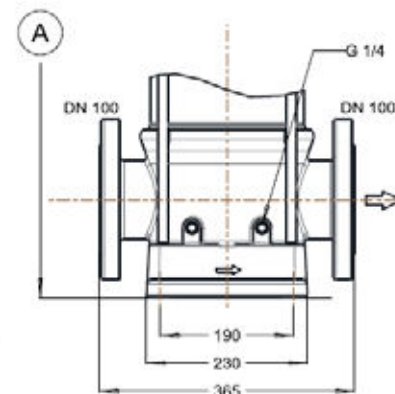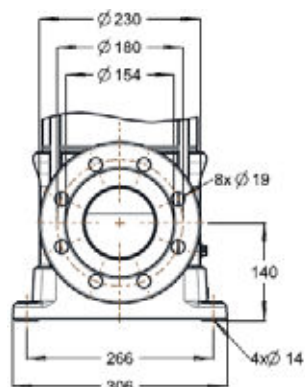

MVVCF 60 B (4 napainen)

Pyöreä laippa
Normi: EN 1092-1/1092-2
Koko: DN100
Pumpun paineluokka: PN16

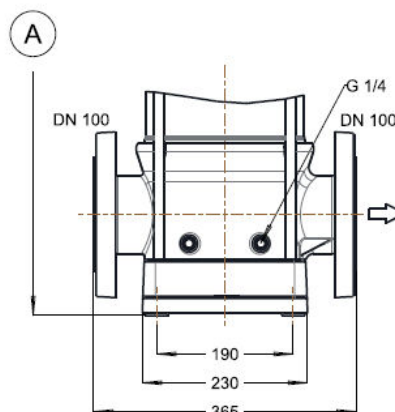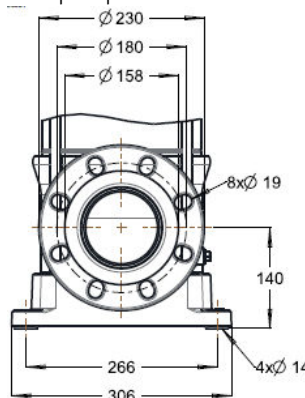

MVV(C/S)F							
Malli	Teho (kW)	Nimellisvirta (A), 3 x 400V	E1	E2	F1	F2	Netto paino
60/3	2,2	4,5	195	145	973	643	103
60/4	3	6,8	195	145	1051	721	108
60/5	4	8,4	220	167	1150	799	123
60/6	4	8,4	220	167	1228	877	127
60/7	5,5	11,3	260	192	1430	1045	179
60/8	5,5	11,3	260	192	1508	1123	193
60/9	5,5	11,3	260	192	1586	1201	209
60/10	7,5	15,3	260	192	1664	1279	213

Pumppumoottori on korkeahyötysuhteinen IE2 (ent. EFF1) vaatimukset täyttävä IEC-normimoottori (IEC 60034-30/EUP-direktiivi 2005/32/EC)

01/2014 Oikeus muutoksiin pidätetään

