


Mounting and operating instruction

For article no's starting with AA, except for AAS

EAC

17.657-03







0- ...bar

0- ...°C

Acc.PED (97/23/EC) §3.3















< 50% glycol

ø22mm



0 bar

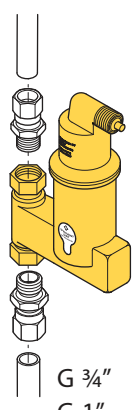

G 3/4"


G 1"




ø22mm



0 bar

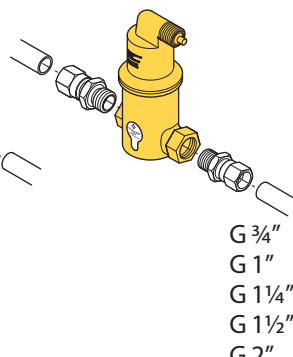

G 3/4"

G 1"

G 1 1/4"

G 1 1/2"

G 2"



Pmax = 1,5 x ...bar

