


		AL_-1102/4 MD 1,5kW		Item		Page: 1																									
		Receiver		From																											
Company name																															
Department																															
Phone number																															
Fax no.																															
e-mail address																															
Requested data																															
Fluid	Water			Nominal flow		l/s																									
Solids	Type			Nominal head		m																									
	Weight %	0		Static head		m																									
pH-value at t A				Available system NPSH		m																									
Operating temperature t A °C 20				Inlet pressure		kPa 0																									
Density at t A kg/m³ 998.3				Altitude		m 100																									
Kin. viscosity at t A cSt 1.005																															
Vapour pressure at t A kPa 2.34																															
Pumpenbezeichnung		AL-1102/4MD 1.5kW		Pumpe																											
Pumppu- ja positionumerot				Impeller type																											
Frame size				Impeller construction																											
Design		In-line pump with frequency converter MD		Impeller Ø	Max.	mm	172																								
Weight		66			Designed	mm	172																								
Self-suctioning		☐ Yes			Min.	mm	172																								
Speed		1/min	1800	Flow	Nominal	l/s	13.7																								
Max. operating pressure		kPa	121		Max-	l/s	25.4																								
Max. diff. pressure		kPa	121		Min-	l/s	0																								
No. stages		1		Head	Nominal	m																									
No. diffusers		1			@ Qmax	m	1.1																								
					@ Qmin	m	12.4																								
Suction port	Pressure rating			Head H(Q=0)		m	12.4																								
	Nominal pipe size			NPSH 3%		m																									
Discharge port	Standard			Shaft power		kW																									
	Pressure rating			Max. shaft power at max. impeller		kW	1.59																								
	Nominal pipe size			Efficiency																											
Standard																															
Materials Pump parts																															
Pump		Pump: Grey cast iron PN10		Shaft seal		Standard seal																									
Impeller		Cast iron																													
 <table border="1"> <thead> <tr> <th colspan="2">Dimensions mm</th> </tr> </thead> <tbody> <tr><td>A</td><td>450</td></tr> <tr><td>B</td><td>150</td></tr> <tr><td>C</td><td>465</td></tr> <tr><td>DN</td><td>DN100</td></tr> <tr><td>E</td><td>305</td></tr> <tr><td>E2</td><td>380</td></tr> <tr><td>L1</td><td>140</td></tr> <tr><td>L2</td><td>170</td></tr> <tr><td>L3</td><td>170</td></tr> <tr><td>minF</td><td>150</td></tr> <tr><td>Ø</td><td>16</td></tr> </tbody> </table>								Dimensions mm		A	450	B	150	C	465	DN	DN100	E	305	E2	380	L1	140	L2	170	L3	170	minF	150	Ø	16
Dimensions mm																															
A	450																														
B	150																														
C	465																														
DN	DN100																														
E	305																														
E2	380																														
L1	140																														
L2	170																														
L3	170																														
minF	150																														
Ø	16																														
Motor				Coupling																											
Type	Kolmeks KP-90-2 B F19 1,5kW			Type																											
Specific design	- / 50 Hz / Pole pairs 2			Series																											
Rated power kW	1.5	Speed 1/min		Spacer length	mm																										
Electric voltage V	1~ 230	Electric current A	10.3	Frame size																											
Degree of protection	IP 54	Frame size	90	Max input current																											
Type of protection	--	Explosion protection		Max input current																											
Remarks:																															
Project		Business process IC		Issue date		Last update																									
				2022-09-07		2022-09-07																									

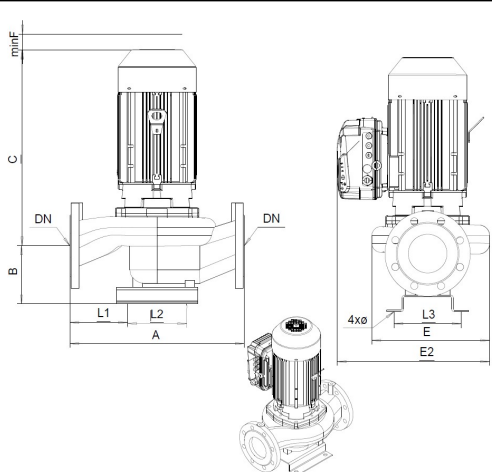